

SWS008

PN: SW25029IA67

Key features:

- Frequency for 433MHz
- Small size
- Ground Plane Dependent
- Impedance 50 Ohm



Typical applications:

- Remote monitoring
- Network Devices
- Gateway
- Router/CPE
- Others

1. Specifications	3
2. Antenna Characteristics	4
3. Radiation Patterns	6
4. Antenna Drawings	7
Changelog	8

Sunnyway RF reserves the right to change specifications and product descriptions.

Sunnyway RF reserves all rights to this document and the information contained herein. reproduction, use or disclosure to third parties without express permission is strictly prohibited.


1. Specifications

Electrical: Test on GND of 90 * 150mm	
Frequency range (MHz)	433MHz
Peak Gain (dBi)	2.29
Average Gain (dB)	-4.26
VSWR	1.90
Return Loss	-10.14
Efficiency (%)	37.53
Polarization mode	Linear
Radiation pattern	Omni-Directional
Output impedance (Ω)	50
Max. Input Power(W)	5


Mechanical	
Mounting Type	Welding
Antenna size(mm)	42.4 X ϕ 5.5
Material	Brass
Environmental	
Operating Temperature (°C)	- 20 °C ~ + 65 °C
Storage Temperature(°C)	-20°C ~ + 65 °C

2. Antenna Characteristics


2.1 Test Setup

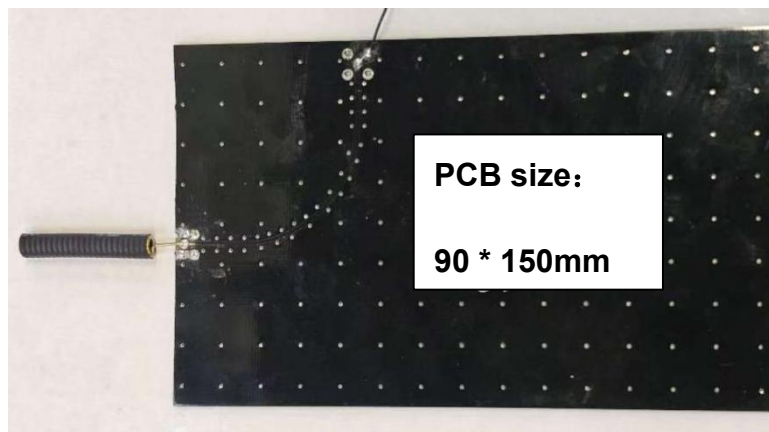


2.2 VSWR

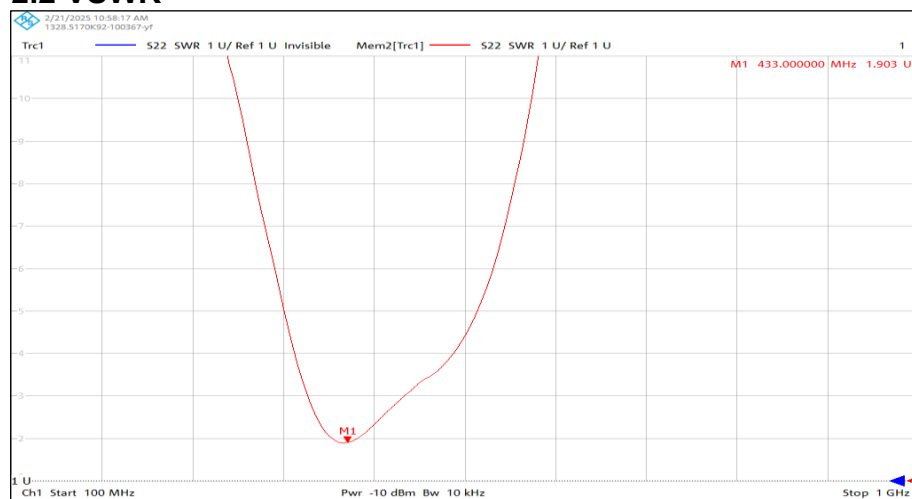


2.3 Return Loss

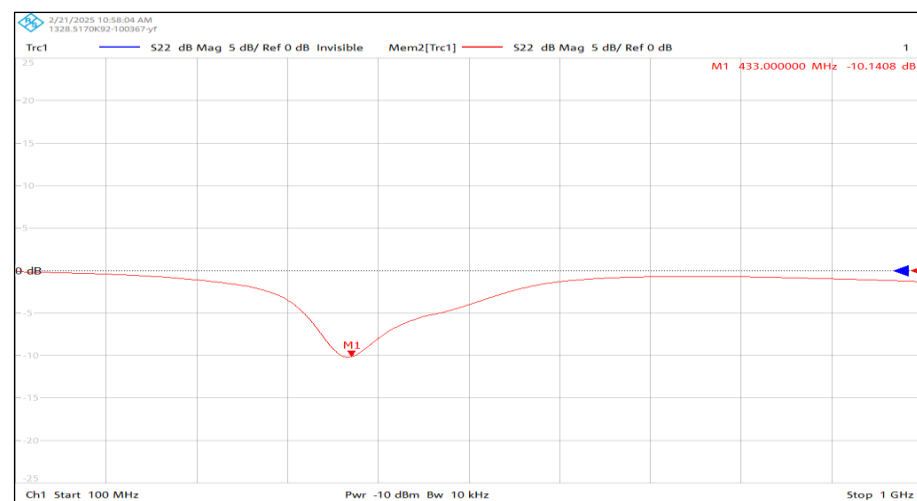








2.4 Efficiency

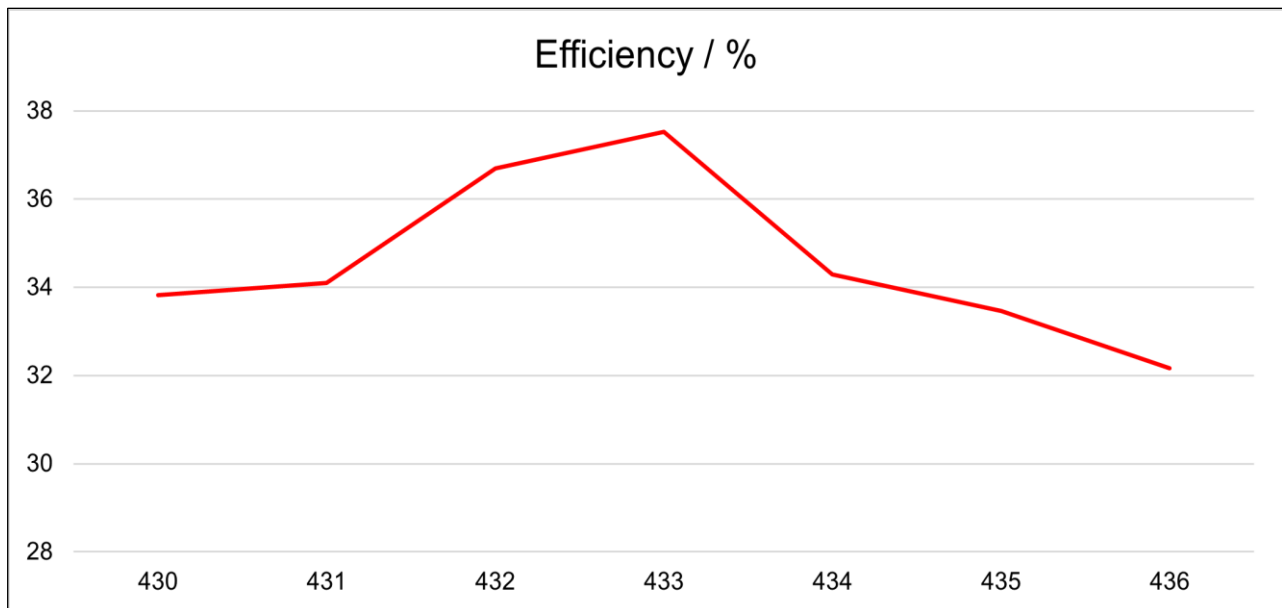

2.5 Gain


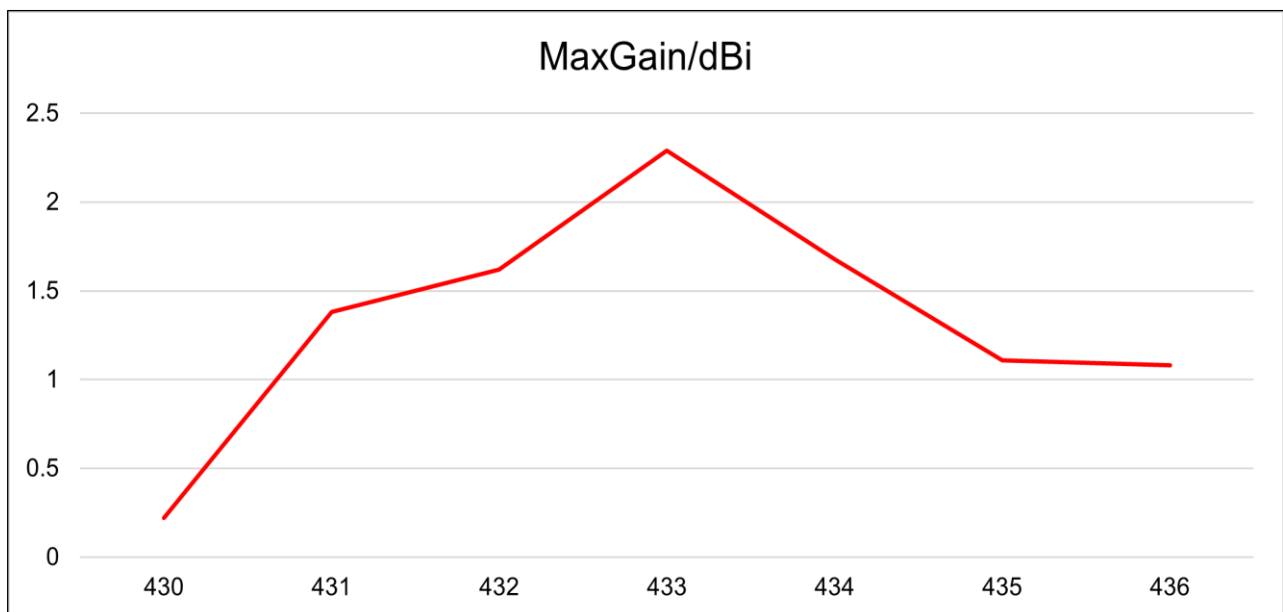


3. Radiation Patterns

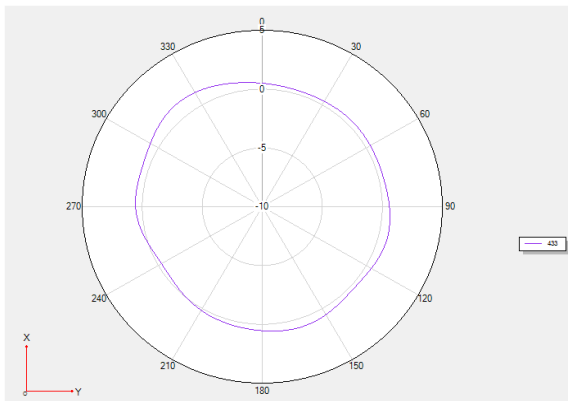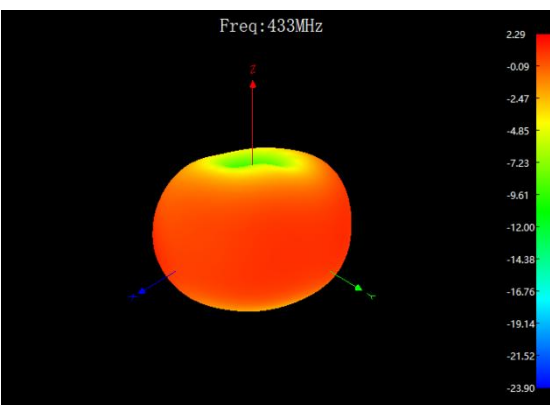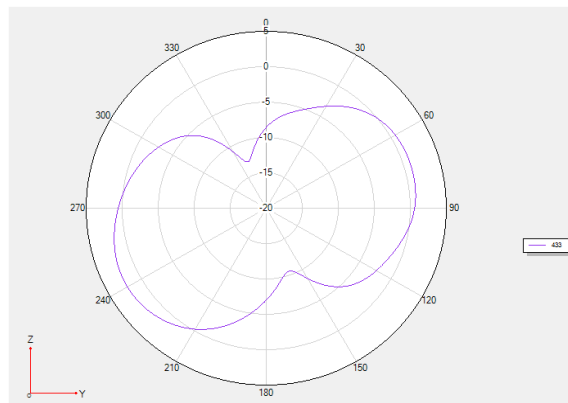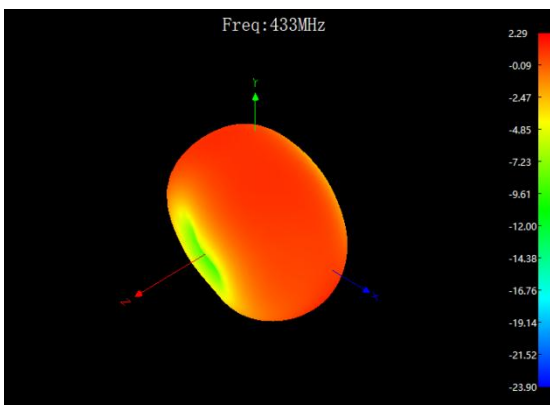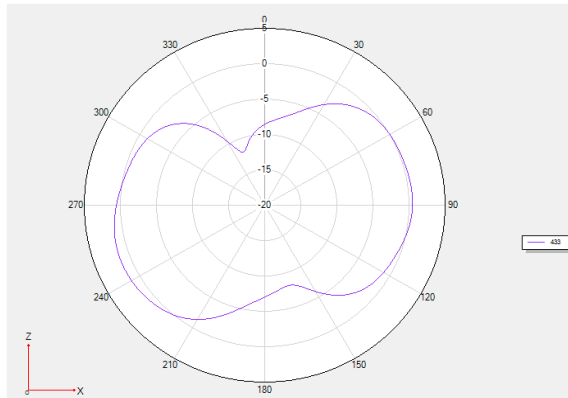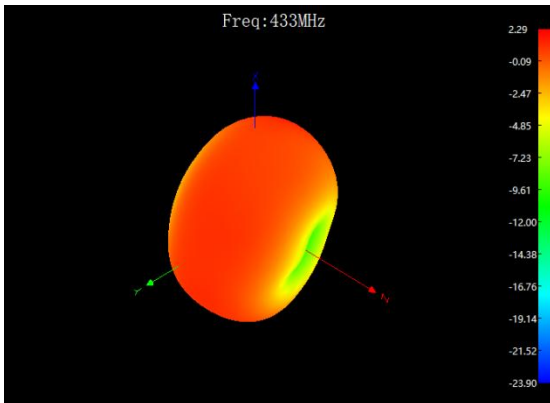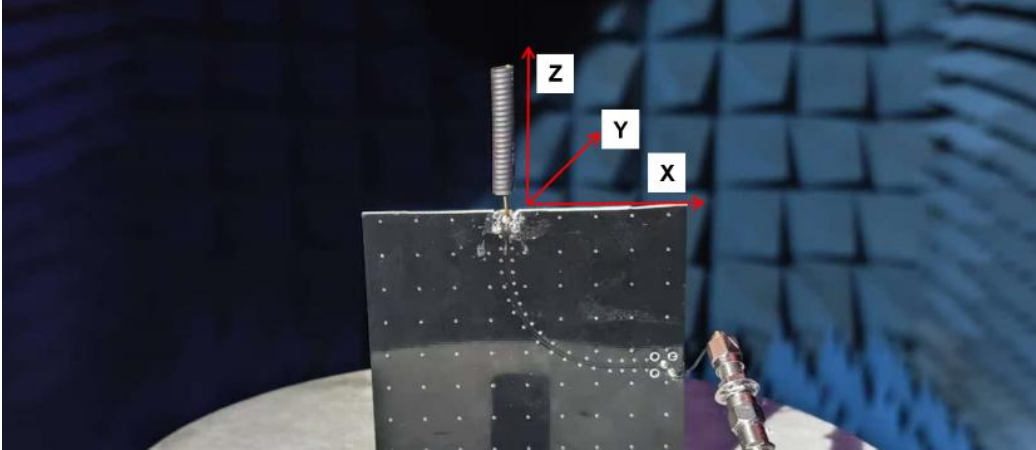

4. Antenna Drawings

Unit: mm

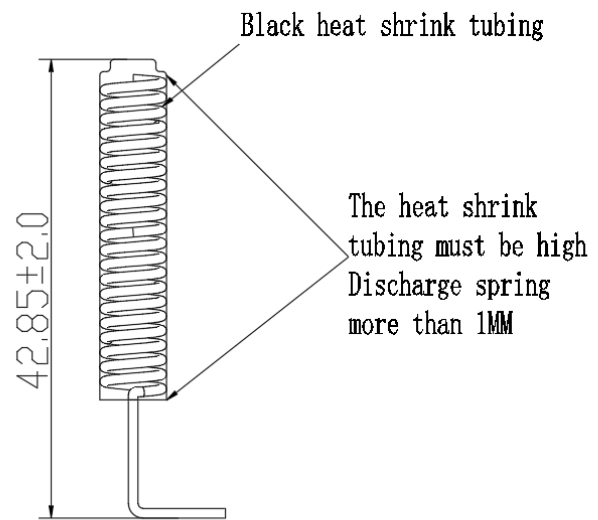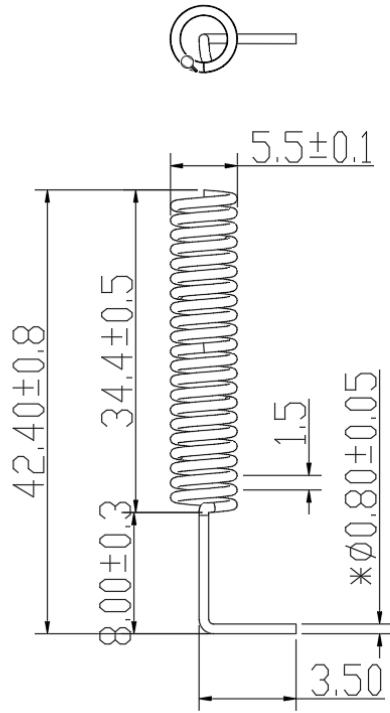

Material: Brass; dextrorotation

Changelog for the datasheet			
Revision	Date	Author:	Notes:
V0	2025-02-21	Kevin LV	Initial Datasheet Release